

Digistat+RF

Wireless Room Thermostat

Drayton

by **Schneider** Electric



BUILT FOR EASE

Drayton's stylish Digistat+ RF with tactile, audible & visual feedback. Featuring a familiar dial control with a digital display to show that the temperature has been set accurately every time.

- User adjustable Set-back feature – at the push of a button
- User adjustable Min/Max temperature setting
- Digital Display situated above dial is easy to read

The product can be configured with a minimum temperature setting to protect the vulnerable.



BRITISH BUILT TO LAST

FEATURES:

- Conventional dial adjustment
- On/off load compensation
- Tactile dial
- 1°C setting steps
- Tactile & audible feedback via click of the dial
- Visual feedback via digital display
- Set-back feature
- Min/Max temperature setting
- Battery powered
- Digital display situated above dial is easy to read


BENEFITS OF WIRELESS SYSTEMS:

The Digistat+ Wireless System provides a cost effective solution to the problems encountered during the installation of a standard wired room thermostat.

CONSIDER THE BENEFITS OF A WIRELESS THERMOSTAT:

- No carpets and floor-boards to lift
- No damage to wall coverings
- No unsightly surface wiring
- Positioning no longer restricted to areas accessible by cable runs
- No brick or plaster work to chase out
- No damage to fabrics and furnishings in the process

SCR Receiver wiring

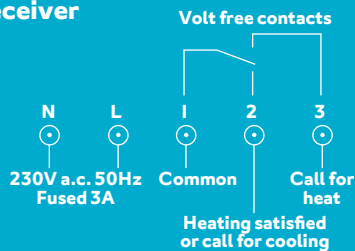

HOW DO WE MEASURE UP?

Digistat +RF (transmitter)



Digistat SCR



TECHNICAL DATA

Model	Digistat+RF	SCR (receiver)
Power supply:	2 X 1.5V IEC LR6 (AA) alkaline batteries	230V a.c. 50Hz
Switch type and rating:	N/A	SPDT (voltage free) 2(1)A 230V a.c. or 24V a.c./d.c
Wiring:	Designed for fixed wiring only, to comply with current IET wiring regulations (BS7671).	
Mounting:	Suitable for surface or conduit box mounting	Industry standard wall plate
Battery life:	2 years typical	N/A
Ambient temperature:	Operating 0°C to 40°C Storage - 20°C to 55°C	
Ambient humidity (non condensing):	Operating 25% to 90% Storage 15% to 95%	
Temperature range:	5°C to 30°C	
Temperature resolution:	1.0°C	
Control accuracy:	+ 0.5K @ 20°C	
Ball pressure test:	75°C	
Pollution degree:	2	
Protection level:	IP30	
Software class:	A	
Radio frequency:	433 MHz	
Radio signal range:	30m typically. The range may be affected by the composition / density and number of walls between the thermostat and receiver.	
Energy class:	IV = 2% (Acc. EU 811/2013, 812/2013, 813/2013, 814/2013)	
Relevant EC directives:	2014/53/EU Radio Equipment Directive 2006/66/EC Batteries Directive 2011/65/EU RoHS Directive	
Applied standards:	EN60730-1; EN60730-2-9 EN 300 220-2; EN 301 489-3	



9° NETWORK

Join our professional installer club today and benefit from extended guarantees, priority support and much more.

www.draytoncontrols.co.uk/9degrees



HEAR ALL THE NEWS
@draytonheating



WATCH OUR VIDEOS
/draytoncontrols



Technical Support: **0333 7000 622**
Customer Services: **0333 6000 622**

www.draytoncontrols.co.uk | customer.care@draytoncontrols.co.uk



FM 00607

D99-4

In accordance with our continuous improvement procedures, we reserve the right to change design features and specifications without prior notification. The Data contained in this document is for guidance only. Drayton accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within.