


GRP CONSTRUCTION BRASS ISOLATION & DRAIN VALVES



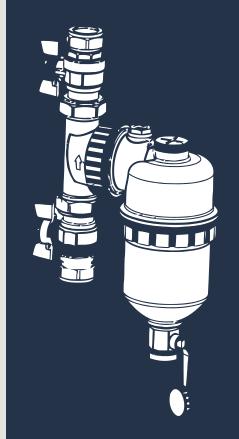

PRODUCT DATA SHEET 22MM MAGNETIC FILTER TRADE03PB

• Removing iron, nickel and cobalt particles in the water

• Providing consistent protection for the boiling system

• Extending longevity of the system

• Saving energy by 6% per annum

• Reducing carbon emission

Saving maintenance cost

• No extra operating cost

Easy to install and clean

• Max flow rate: 6.9 M³/h

• Filter volume: 530ml

• Working pressure: 3 bar

• Maximum pressure: 6 bar

• Max Dynamic Pressure: 1.5 bar


Maximum temperature: 90°C

Magnetic field of rod: 9200 gauss

Body: Glass fibre reinforced nylon

Connection 2 x ball valves - Ø22 compression

• Weight: 1.48Kg

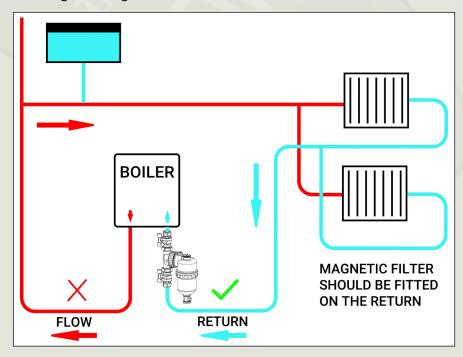

TFC GROUP

22mm Magnetic Filter TRADE03PB





TFC GROUP, TOWER HOUSE, VALE RISE, TONBRIDGE, KENT TN9 1TB

Tel: 01732 351680 Fax: 01732 354445 www.tfc-group.co.uk

Prepared for TFC Group By: M. Edmonston

Issue 1: May 2021 Page 1 of 1