
ideal HEATING

IDEAL PRO DIRECT

90 | 120 | 150 | 180 | 210 | 250 | 300L

25 YEAR WARRANTY

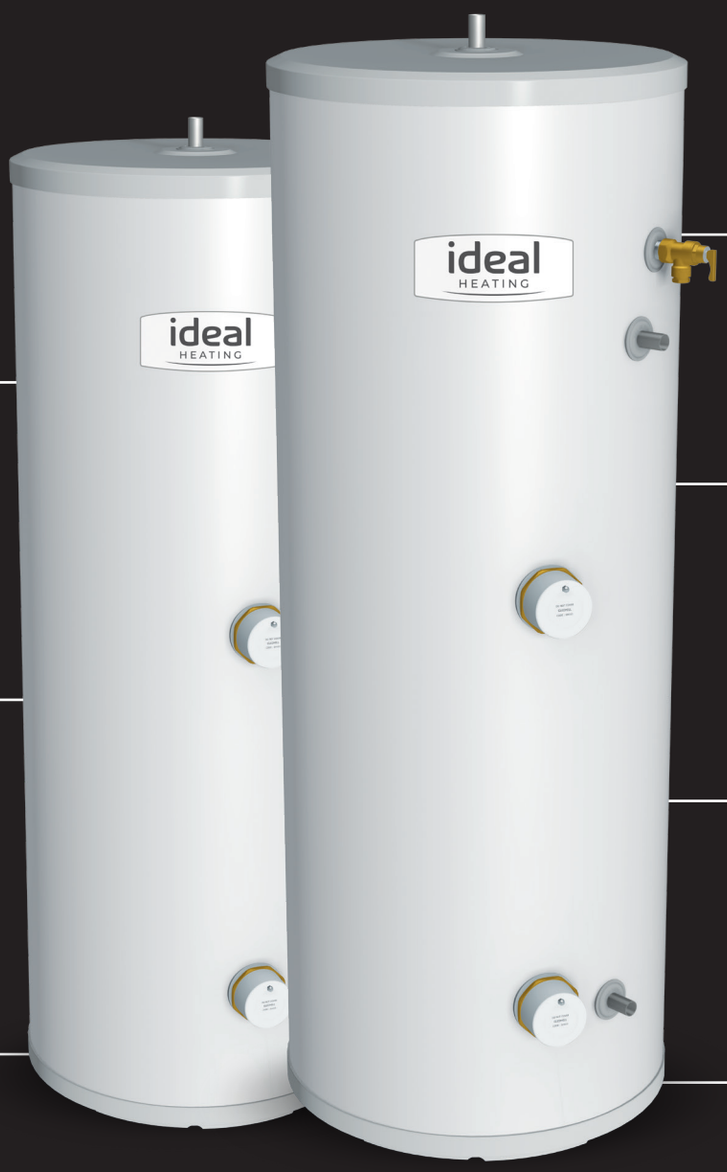

Designed with flat top to increase insulation

Suitable for use with economy electricity tariffs to maximise efficiency

External expansion allows for installation in height restricted areas and easier servicing

Aligned tapping positions promote easier installation


Colour matched components

Durable rubber connection labels and caps with foam retention

Wide base to improve unit stability

idealheating.com

TECHNICAL SPECIFICATION
Ideal Pro Direct

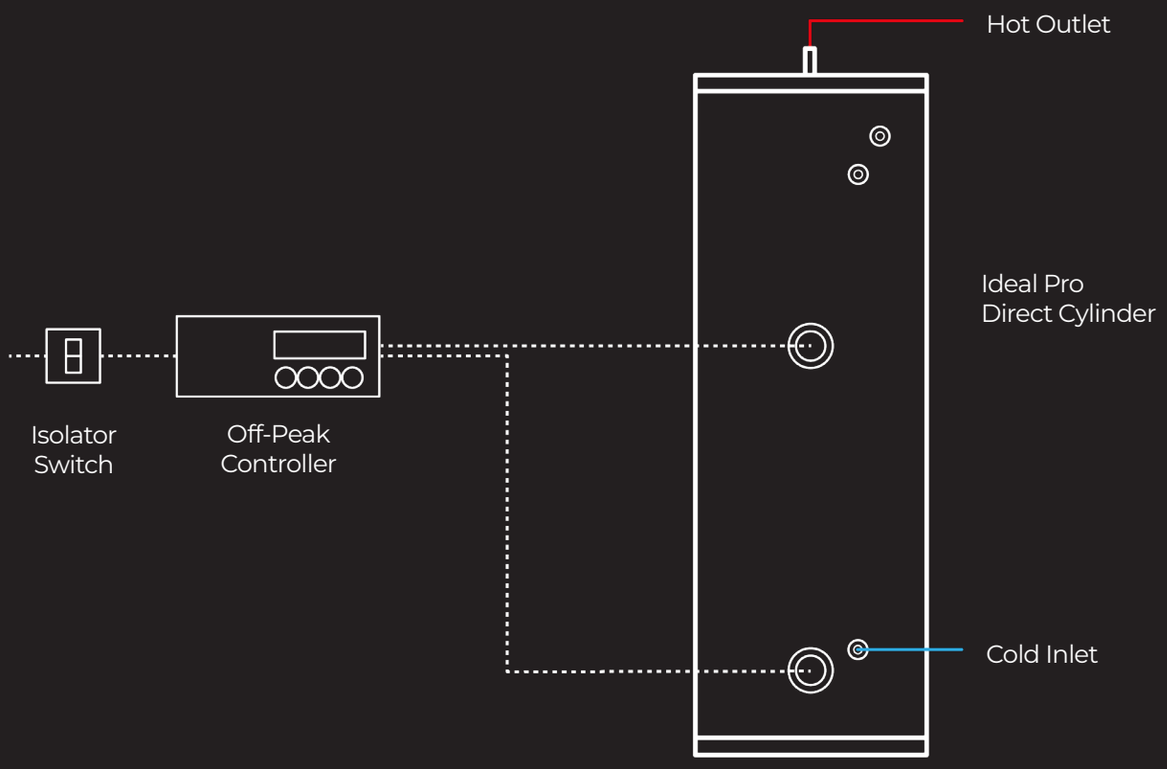

Description		D90	D120	D150	D180	D210	D250	D300
Product stock code		IDEPRODR090	IDEPRODR120	IDEPRODR150	IDEPRODR180	IDEPRODR210	IDEPRODR250	IDEPRODR300
ERP		C	C	C	C	C	C	C
Load profile		L	L	L	L	L	L	L
Heat loss	watts	32	39	47	55	62	74	86
Heat loss (kw/24hr)	watts	0.77	0.94	1.13	1.32	1.49	1.78	2.06
Capacity	litres	91	119	148	178	208	248	287
Height	mm	764	931	1118	1306	1494	1744	1990
Diameter	mm	550	550	550	550	550	550	550
Empty weight	kg	18	21	25	28	32	36	41
Full weight	kg	109	140	173	206	240	284	328
Heat up time	min	90	119	150	179	209	249	299
Number of immersions		1	2	2	2	2	2	2
Secondary return		NO	NO	NO	NO	YES	YES	YES

NOTES:

1 Heat up time from 15°C to 60°C (applies to primary heat source only)
2 For further ErP information, please refer to the installation manual at **idealheating.com**
3 The schematics shown above are representational, please refer to the installation manual for full technical requirements
4 25 years on vessel and 2 years parts and labour

T: 01482 492251 E: ideal@idealheating.com
Ideal Heating, PO Box 103, National Avenue, Kingston upon Hull, East Yorkshire, HU5 4JN.

IHD_Ideal_Pro_Direct_Spec_Sheet